

1080P NDI PTZ Camera




AMC-NE220NV3


Features

- NDI|HX supported;
- 1/2.8" CMOS image sensor, up to 2.14MP;
- 20x optical zoom, 12X digital zoom, up to 59.5° FOV;
- H.265 video compression, dual stream;
- Video output: HDMI, 3G-SDI;
- Control Interface: RS-232 In/Ir, RS-232 Out/RS-485;
- Image flip function for stand and suspended installations;
- Standard VISCA & Pelco communication protocols.


Dimensions

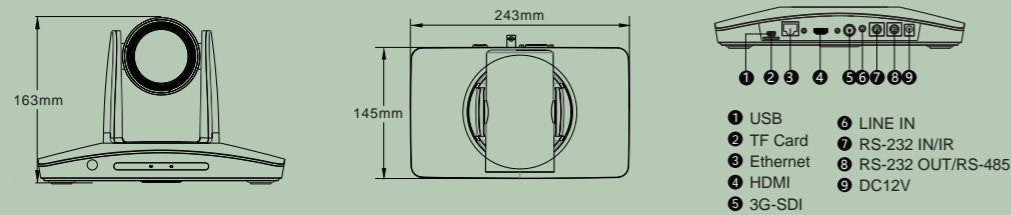

Accessories



Wall Bracket



Ceiling Plate

Technical Data

Model	AMC-NE220NV3
Camera	
Image Sensor	1/2.8" CMOS, 2.14MP
Focal Lens	f=4.7 - 94.0mm
Iris	F1.6 - F3.5
Optical Zoom	20X
Digital Zoom	12X
FOV	59.5° - 2.9°
Focus	Auto, Manual, PTZ Trigger, One Push Trigger
Exposure	Auto, Manual, Shutter Priority, Iris Priority, Smart
Shutter Speed	1/1 ~ 1/10,000s
AGC	Auto/Manual
White Balance	Auto, Indoor, Outdoor, One Push, Manual, Auto Tracking, Sodium, Fluorescent
WDR	Support
BLC	Support
DNR	2D/3D
SN Ratio	≥50dB
PTZ	
Pan	-170° ~ +170°, 0.1° ~ 120°/S
Tilt	-30° ~ +90°, 0.1° ~ 80°/S
Preset Number	256
OSD	Yes
Image Flip	Yes
SDI Output	
Video Format	1080I60/I50, 1080P60/P50/P30/P25, 720P60/P50
Network	
Max Image Size	1080P60
Image Compression	H.264/H.265
Audio Compression	AAC
Protocols	ONVIF, RTSP, RTMP, HTTP, TCP, UDP
Dual Stream	Support
Interface	
Video Output	1xHDMI, 1x3G-SDI, 1xUSB2.0, 1xEthernet
Audio	1xLine In
Network Interface	10M/100/1000M RJ45, NDI, POE(optional)
Control Interface	1xRS-485, 1xRS-232 In, 1xRS-232 Out
General	
Protocols	VISCA (support daisy chain), PELCO-P, PELCO-D
Address	0~63
Power	DC12V
Power Consumption	<20W
Operating Environment	Temperature: 0°C ~ +40°C, Relative Humidity: 10%RH ~ 90 %RH
Storage Environment	Temperature: -20°C ~ +60°C, Relative Humidity: 10%RH ~ 95 %RH
Dimensions (LxWxH)	243mmx145mmx163mm
Weight	1.2KG