

1080P USB2.0 PTZ Camera




AMC-M1001V3/AMC-M0301V3


Features

- Latest CMOS sensor, up to 1080P30;
- 10X/3X optical zoom;
- Advanced 2D/3D noise reduction algorithm, excellent noise control;
- Smooth operation, accurate positioning;
- Support H.264, H265, MJPEG compressed video output, standard UVC protocol;
- USB output;
- Support USB and remote control to control the camera;
- Power consumption <5W;
- Base with tripod thread interface for tripod installation.

Dimensions

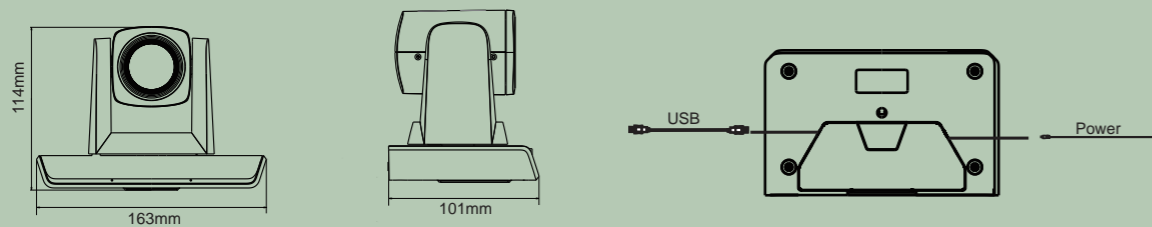

Accessories



Wall Bracket

Technical Data

Model	AMC-M1001V3	AMC-M0301V3
Camera		
Image Sensor	1/2.8" CMOS, 2.16MP	
Optical Zoom	10X	3X
Focal Length	f=5.15-47.38mm	f=3.41-10.33mm
Iris	F2.38	F1.7-3.0
FOV	62.2°-7.08°	80.5°-32°
Focus	Auto, Manual, PTZ Trigger, One Push Trigger	
Exposure	Auto, Manual, Shutter Priority, Brightness Priority	
White Balance	Auto, Manual, One Push Trigge, Auto Tracking	
AGC	Auto, Manual	
Shutter Speed	1/60~1/10,000s	1/25~1/10,000s
BLC	Support	
DNR	2D/3D	
SN Ratio	≥50dB	
PTZ		
Pan Angle	-90°~+90°	
Tilt Angle	-30°~+90°	
Pan Speed	15°/S	
Tilt Speed	10°/S	
Preset Number	32	
Interface		
Audio Port	Line In	
IR Remote Control	Support	
USB		
Max Image Size	1080P30	
Image Compression	H.264/H.265/MJPEG	
UVC Protocol	USB2.0, UVC 1.0	
UVC PTZ Control	Support	
General		
Power	DC12V	
Power Consumption	< 5W	
Operating Environment	Temperature: 0°C ~ +40°C, Relative Humidity: 10%RH ~ 90 %RH	
Storage Environment	Temperature: -20°C ~ +60°C, Relative Humidity: 10%RH ~ 95 %RH	
Dimensions (LxWxH)	163mmx101mmx114mm	
Weight	0.6KG	