

4KP60 PTZ Camera




AMC-G500

Features

- 1/2.8"4K CMOS, 8.46MP;
- 4K super resolution lens, 12X, Max FOV: 81°, Max support 4KP60;
- Support HDMI、 USB、 ETHERNET and 3G-SDI interface, support POE;
- High precision, smooth rotation, quiet PTZ;
- Supports multiple control protocol and interface, support Daisy chain;
- Designed for huddle room and small sized meeting rooms;
- Compatible with Zoom, TEAMS and other mainstream CloudMeeting platforms.

Dimensions

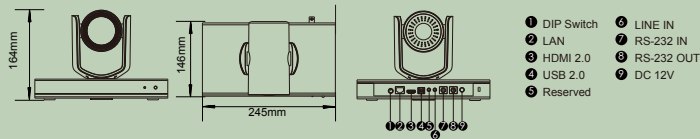

Technical Data

Model	AMC-G500
Camera	
Image Sensor	1/2.8" CMOS, 8.46MP
Lens	Optical Zoom12X, Digital Zoom12X, f=3.4mm ~ 40.3mm, F1.8 ~ F3.6
HFOV	81° ~ 7.6°
Image	Auto Focus, Auto Exposure, Auto White Balance
SNR	≥55dB
BLC/WDR	Support
PTZ	
Pan Angle	-130°~+130°, 0.1°~87°/S
Tilt Angle	-30°~+90°, 0.1°~67°/S
Preset Number	256
Menu	Support
Interface	
HDMI 2.0	4KP60/P50/P30/P25, 1080P60/P50/P30/P25, 1080i60/i50, 720P60/P50
USB 2.0	MJPEG/H.264, 4KP30/P25, 1080P30/P25, 720P30/P25, 360P30/P25
Network Interface	1×10M/100M/1000M RJ45 POE Supported Max 4KP60 H.264/H.265
Audio Compression	AAC
Audio Input	1×LINE IN, 3.5mm
Network Protocol	RTSP/ONVIF/RTMP/HTTP/TCP/UDP/RTP
Dual Stream	Main/Sub
General	
Control Protocol	VISCA/PELCO-P/PELCO-D
Addresses	1-7
Power	DC12V: <18W
Dimensions (L×W×H)	245mm×146mm×164mm
Operating Environment	Temperature: 0°C ~ +40°C, Relative Humidity: 10%RH ~ 90%RH
Storage Environment	Temperature: -20°C ~ +60°C, Relative Humidity: 10%RH ~ 95%RH
Weight	<2KG