1080P PTZ Camera


AMC-M1001V3







7 USB 2.0 Design

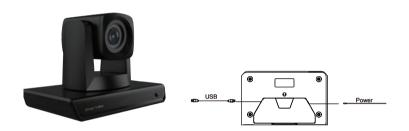

Features

- Supports 1080P30 HD video output, with high-performance 10x optical zoom;
- High precision, smooth operation, accurate positioning;
- Power consumption <5W;
- Support USB2.0 Type-A interface, standard UVC protocol;
- Support H.264/H265, MJPEG compressed video output;
- Compatible with ZOOM, Microsoft Teams in major cloud meeting platform;
- Designed for huddle room and small sized meeting rooms;
- Support USB and remote control to control the camera.

Technical Data

Camera

Image Sensor

1/2.8" CMOS, 2.16MP **Optical Zoom**

Focal Length

f=5.15 ~ 47.38mm

Iris

F2.38

HFOV

62.2°~7.08°

Focus

Auto, Manual

Exposure

Auto, Manual, Shutter Priority, Brightness Priority

White Balance

Auto, Manual, One Push Trigge, Auto Tracking, Static Color Temperature

AGC

Auto, Manual

Shutter Speed

1/60~1/10,000s

BLC

DNR

2D/3D

SNR

≥50dB

Max Image Size

Image Compression

H.264/H.265/MJPEG

UVC PTZ Control

UVC Protocol

USB2.0. UVC 1.0

1080P30

Support

Support

Pan

PTZ

-90°~+90°; 15°/S

Tilt

-30°~+90°; 10°/S

Preset Number

IR Remoter Control

Support

General

Power

DC12V: <5W

Operating Temperature

0°C ~ +40°C

Storage Temperature

-20°C ~ +60°C

Dimensions(L×W×H)

163mm×101mm×114mm

Weight

0.6kg